


Type R55 T / R66 T - reduced bore -

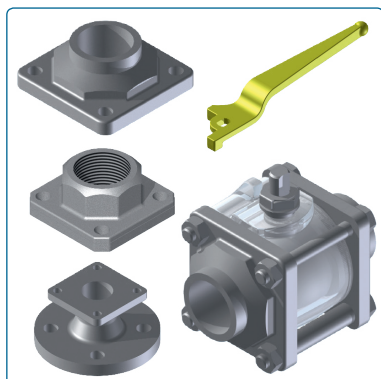

3-pcs. ball valve – steel / stainless steel – gasket TF4215, HT

without mounting flange, with hand lever, PN40


flange (DIN EN 1092-1); threaded ends (ISO 228-1 / NPT); butt weld ends (DIN 11850)

N. diameter:	DN15 ... DN200
N. pressure:	PN40
Body:	steel 1.0460 / 1.0619; stainless steel 1.4404 / 1.4408
Ball:	stainless steel 1.4408
Gasket:	TF4215
Temperature:	up to 250 °C
Face-to-face:	flanges EN 558-1 R1
Optional:	see accessories / spare parts

CBS	Butt weld ends in accordance with DIN 11850 - R1 / R2
CBG	Female thread in acc. with DIN EN ISO 228-1 (DIN 259) / DIN 2999
CBB	NPT-Female thread in accordance with ANSI B2.1
CBF	Flanges in acc. with DIN EN 1092-1 PN40, PN10/16 on request

Bore reduced	N. diameter DN Inch	R55 T Steel				R66 T Stainless steel			
		CBS	CBG	CBB	CBF	CBS	CBG	CBB	CBF
015	1/2"	...R55...	...R55...	...R55...	...R55...	...R66...	...R66...	...R66...	...R66...
020	3/4"	...R55...	...R55...	...R55...	...R55...	...R66...	...R66...	...R66...	...R66...
025	1"	...R55...	...R55...	...R55...	...R55...	...R66...	...R66...	...R66...	...R66...
032	1 1/4"	...R55...	...R55...	...R55...	...R55...	...R66...	...R66...	...R66...	...R66...
040	1 1/2"	...R55...	...R55...	...R55...	...R55...	...R66...	...R66...	...R66...	...R66...
050	2"	...R55...	...R55...	...R55...	...R55...	...R66...	...R66...	...R66...	...R66...
065	2 1/2"	...R55...	...R55...	...R55...	...R55...	...R66...	...R66...	...R66...	...R66...
080	3"	...R55...	...R55...	...R55...	...R55...	...R66...	...R66...	...R66...	...R66...
100	4"	...R55...	...R55...	...R55...	...R55...	...R66...	...R66...	...R66...	...R66...
125	5"	...R55...	-	-	...R55...	...R66...	-	-	...R66...
150	6"	...R55...	-	-	...R55...	...R66...	-	-	...R66...
200	8"	...R55...	-	-	...R55...	...R66...	-	-	...R66...

Type RA55 T / RA66 T - reduced bore -

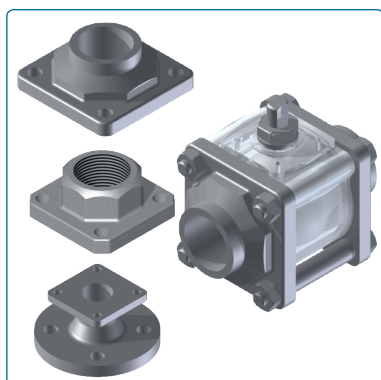

3-pcs. ball valve – steel / stainless steel – gasket TF4215

with mounting flange, without hand lever, PN40

flange (DIN EN 1092-1); threaded ends (ISO 228-1 / NPT); butt weld ends (DIN 11850)

N. diameter:	DN15 ... DN200
N. pressure:	PN40
Body:	steel 1.0460 / 1.0619; stainless steel 1.4404 / 1.4408
Ball:	stainless steel 1.4408
Gasket:	TF4215
Temperature:	up to 250 °C
Face-to-face:	flanges EN 558-1 R1
Optional:	see accessories / spare parts

Order code

MF-40 R _ _ _ H _ _ _ R _ _ _

Type: R

Type: RA

Steel: 55

Stainless steel: 66

Gasket TF4215: H

N. diameter DN: _ _ _

Bore reduced: R

Bore full: V

Butt weld ends: CBS


DIN-Female thread: CBG

NPT-Female thread: CBB

Flanges: CBF

Bore reduced	N. diameter DN Inch	RA55 T Steel				RA66 T Stainless steel			
		CBS	CBG	CBB	CBF	CBS	CBG	CBB	CBF
015	1/2"	...RA55...	...RA55...	...RA55...	...RA55...	...RA66...	...RA66...	...RA66...	...RA66...
020	3/4"	...RA55...	...RA55...	...RA55...	...RA55...	...RA66...	...RA66...	...RA66...	...RA66...
025	1"	...RA55...	...RA55...	...RA55...	...RA55...	...RA66...	...RA66...	...RA66...	...RA66...
032	1 1/4"	...RA55...	...RA55...	...RA55...	...RA55...	...RA66...	...RA66...	...RA66...	...RA66...
040	1 1/2"	...RA55...	...RA55...	...RA55...	...RA55...	...RA66...	...RA66...	...RA66...	...RA66...
050	2"	...RA55...	...RA55...	...RA55...	...RA55...	...RA66...	...RA66...	...RA66...	...RA66...
065	2 1/2"	...RA55...	...RA55...	...RA55...	...RA55...	...RA66...	...RA66...	...RA66...	...RA66...
080	3"	...RA55...	...RA55...	...RA55...	...RA55...	...RA66...	...RA66...	...RA66...	...RA66...
100	4"	...RA55...	...RA55...	...RA55...	...RA55...	...RA66...	...RA66...	...RA66...	...RA66...
125	5"	...RA55...	-	-	...RA55...	...RA66...	-	-	...RA66...
150	6"	...RA55...	-	-	...RA55...	...RA66...	-	-	...RA66...
200	8"	...RA55...	-	-	...RA55...	...RA66...	-	-	...RA66...

Type R55 T / R66 T - full bore -

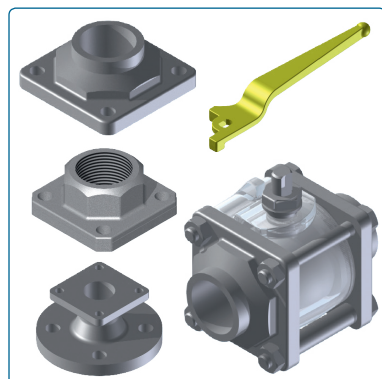

3-pcs. ball valve – steel / stainless steel – gasket TF4215, HT

without mounting flange, with hand lever, PN40


Flange (DIN EN 1092-1); threaded ends (ISO 228-1 / NPT); butt weld ends (DIN 11850)

N. diameter:	DN08 ... DN150
N. pressure:	PN40
Body:	steel 1.0460 / 1.0619; stainless steel 1.4404 / 1.4408
Ball:	stainless steel 1.4408
Gasket:	TF4215
Temperature:	up to 250 °C
Face-to-face:	flanges EN 558-1 R1
Optional:	see accessories / spare parts

CBS	Butt weld ends in accordance with DIN 11850 - R1 / R2
CBG	Female thread in acc. with DIN EN ISO 228-1 (DIN 259) / DIN 2999
CBB	NPT-Female thread in accordance with ANSI B2.1
CBF	Flanges in acc. with DIN EN 1092-1 PN40, PN10/16 on request

Bore full	N. diameter DN Inch	R55 T Steel				R66 T Stainless steel			
		CBS	CBG	CBB	CBF	CBS	CBG	CBB	CBF
008	1/4"	...R55...	...R55...	...R55...	...R55...	...R66...	...R66...	...R66...	...R66...
010	3/8"	...R55...	...R55...	...R55...	...R55...	...R66...	...R66...	...R66...	...R66...
015	1/2"	...R55...	...R55...	...R55...	...R55...	...R66...	...R66...	...R66...	...R66...
020	3/4"	...R55...	...R55...	...R55...	...R55...	...R66...	...R66...	...R66...	...R66...
025	1"	...R55...	...R55...	...R55...	...R55...	...R66...	...R66...	...R66...	...R66...
032	1 1/4"	...R55...	...R55...	...R55...	...R55...	...R66...	...R66...	...R66...	...R66...
040	1 1/2"	...R55...	...R55...	...R55...	...R55...	...R66...	...R66...	...R66...	...R66...
050	2"	...R55...	...R55...	...R55...	...R55...	...R66...	...R66...	...R66...	...R66...
065	2 1/2"	...R55...	...R55...	...R55...	...R55...	...R66...	...R66...	...R66...	...R66...
080	3"	...R55...	...R55...	...R55...	...R55...	...R66...	...R66...	...R66...	...R66...
100	4"	...R55...	-	-	...R55...	...R66...	-	-	...R66...
150	6"	...R55...	-	-	...R55...	...R66...	-	-	...R66...

Type RA55 T / RA66 T - full bore -

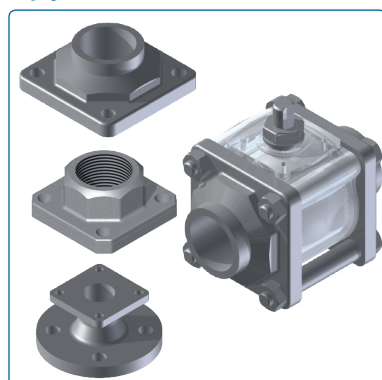

3-pcs. ball valve – steel / stainless steel – gasket TF4215

with mounting flange, without hand lever, PN40

Flange (DIN EN 1092-1); threaded ends (ISO 228-1 / NPT); butt weld ends (DIN 11850)

N. diameter:	DN08 ... DN150
N. pressure:	PN40
Body:	steel 1.0460 / 1.0619; stainless steel 1.4404 / 1.4408
Ball:	stainless steel 1.4408
Gasket:	TF4215
Temperature:	up to 250 °C
Face-to-face:	flanges EN 558-1 R1
Optional:	see accessories / spare parts

Order code

MF-40 R _ _ _ H _ _ _ R _ _ _

Type: R

Type: RA

Steel: 55

Stainless steel: 66

Gasket TF4215: H

N. diameter DN: _ _ _

Bore reduced: R

Bore full: V

Butt weld ends: CBS

DIN-Female thread: CBG

NPT-Female thread: CBB

Flanges: CBF

Bore full	N. diameter DN Inch	RA55 T Steel				RA66 T Stainless steel			
		CBS	CBG	CBB	CBF	CBS	CBG	CBB	CBF
008	1/4"	...RA55...	...RA55...	...RA55...	...RA55...	...RA66...	...RA66...	...RA66...	...RA66...
010	3/8"	...RA55...	...RA55...	...RA55...	...RA55...	...RA66...	...RA66...	...RA66...	...RA66...
015	1/2"	...RA55...	...RA55...	...RA55...	...RA55...	...RA66...	...RA66...	...RA66...	...RA66...
020	3/4"	...RA55...	...RA55...	...RA55...	...RA55...	...RA66...	...RA66...	...RA66...	...RA66...
025	1"	...RA55...	...RA55...	...RA55...	...RA55...	...RA66...	...RA66...	...RA66...	...RA66...
032	1 1/4"	...RA55...	...RA55...	...RA55...	...RA55...	...RA66...	...RA66...	...RA66...	...RA66...
040	1 1/2"	...RA55...	...RA55...	...RA55...	...RA55...	...RA66...	...RA66...	...RA66...	...RA66...
050	2"	...RA55...	...RA55...	...RA55...	...RA55...	...RA66...	...RA66...	...RA66...	...RA66...
065	2 1/2"	...RA55...	...RA55...	...RA55...	...RA55...	...RA66...	...RA66...	...RA66...	...RA66...
080	3"	...RA55...	...RA55...	...RA55...	...RA55...	...RA66...	...RA66...	...RA66...	...RA66...
100	4"	...RA55...	-	-	...RA55...	...RA66...	-	-	...RA66...
150	6"	...RA55...	-	-	...RA55...	...RA66...	-	-	...RA66...