



Type RA55 / RA66 – automated, gasket TF4215



3-pcs. ball valve with pneumatic actuator "AMG"

Actuators / brackets to build on mounting flange in accordance with DIN ISO 5211

Functioning unit of ball valve, bracket and adapter, fully assembled and function tested

Doublepiston swivel-drive pneumatic in accordance with DIN EN 15714-3

designed for 6 bar control pressure

single / double acting, 0° ... 90°; on request 180°

Body aluminium extruded; piston aluminium, mechanically processed, anodized

Operating range -25 °C ... +80 °C

O-ring NBR, on request FKM (Viton®) / Fluorsilicon

ATEX in accordance with directive 94/9/EG, area 1 (gas) and 21 (dust)

	CBS Butt weld ends in accordance with DIN 11850 - R1 / R2
	CBG Female thread in acc. with DIN EN ISO 228-1 (DIN 259) / DIN 2999
	CBB NPT-Female thread in accordance with ANSI B2.1
	CBF Flanges in acc. with DIN EN 1092-1 PN40, PN10/16 on request

full Bore	ISO-Threaded ends / NPT-Threaded ends / Butt weld ends / Flange - Gasket TF4215			
	Ball valve steel type RA55		Ball valve stainless steel type RA66	
	Actuator pneumatic		Actuator pneumatic	
N. diameter DN	single acting	double acting	single acting	double acting
008	KH-RA55-H008VCB_AF	KH-RA55-H008VCB_AD	KH-RA66-H008VCB_AF	KH-RA66-H008VCB_AD
010	KH-RA55-H010VCB_AF	KH-RA55-H010VCB_AD	KH-RA66-H010VCB_AF	KH-RA66-H010VCB_AD
015	KH-RA55-H015VCB_AF	KH-RA55-H015VCB_AD	KH-RA66-H015VCB_AF	KH-RA66-H015VCB_AD
020	KH-RA55-H020VCB_AF	KH-RA55-H020VCB_AD	KH-RA66-H020VCB_AF	KH-RA66-H020VCB_AD
025	KH-RA55-H025VCB_AF	KH-RA55-H025VCB_AD	KH-RA66-H025VCB_AF	KH-RA66-H025VCB_AD
032	KH-RA55-H032VCB_AF	KH-RA55-H032VCB_AD	KH-RA66-H032VCB_AF	KH-RA66-H032VCB_AD
040	KH-RA55-H040VCB_AF	KH-RA55-H040VCB_AD	KH-RA66-H040VCB_AF	KH-RA66-H040VCB_AD
050	KH-RA55-H050VCB_AF	KH-RA55-H050VCB_AD	KH-RA66-H050VCB_AF	KH-RA66-H050VCB_AD

Order code

KH- RA _ _ - H _ _ _ CB _ _ _

Steel: 55

Stainless s.: 66

Gasket TF4215: H

N. diameter DN: _ _ _

Bore reduced: R

Bore full: V

Butt weld ends: CBS

DIN-Female thread: CBG

NPT-Female thread: CBB


Flanges: CBF

single acting: AF

double acting: AD

reduced Bore	ISO-Threaded ends / NPT-Threaded ends / Butt weld ends / Flange - Gasket TF4215			
	Ball valve steel type RA55		Ball valve stainless steel type RA66	
	Actuator pneumatic		Actuator pneumatic	
N. diameter DN	single acting	double acting	single acting	double acting
015	KH-RA55-H015RCB_AF	KH-RA55-H015RCB_AD	KH-RA66-H015RCB_AF	KH-RA66-H015RCB_AD
020	KH-RA55-H020RCB_AF	KH-RA55-H020RCB_AD	KH-RA66-H020RCB_AF	KH-RA66-H020RCB_AD
025	KH-RA55-H025RCB_AF	KH-RA55-H025RCB_AD	KH-RA66-H025RCB_AF	KH-RA66-H025RCB_AD
032	KH-RA55-H032RCB_AF	KH-RA55-H032RCB_AD	KH-RA66-H032RCB_AF	KH-RA66-H032RCB_AD
040	KH-RA55-H040RCB_AF	KH-RA55-H040RCB_AD	KH-RA66-H040RCB_AF	KH-RA66-H040RCB_AD
050	KH-RA55-H050RCB_AF	KH-RA55-H050RCB_AD	KH-RA66-H050RCB_AF	KH-RA66-H050RCB_AD
065	KH-RA55-H065RCB_AF	KH-RA55-H065RCB_AD	KH-RA66-H065RCB_AF	KH-RA66-H065RCB_AD

Accessories / spare parts - gaskets

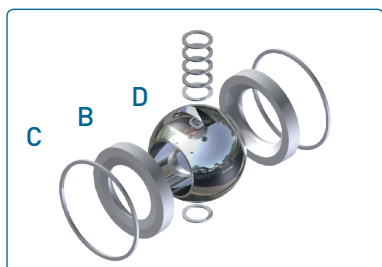

High temperature gasket for Mecafrance-ball valve R / RA

Stemgasket [D] only in PTFE

more gaskets / sets on request

Order code

KH-MFZ- _ _ _ _

Gasket TF4215: H

N. diameter DN: _ _ _

Bore reduced: R

Bore full: V

Set of gaskets [A]: A

Set seat [B]: B

Body-sealing ring[C]: C

N. diameter		TF 4215		
full	Bore	[A] Set of gaskets complete	[B] Set seat (2 pcs.)	[C] Body sealing ring (2 pcs.)
	reduced			
008	-	KH-MFZ-H ... A	KH-MFZ-H ... B	KH-MFZ-H ... C
010	015	KH-MFZ-H ... A	KH-MFZ-H ... B	KH-MFZ-H ... C
015	020	KH-MFZ-H ... A	KH-MFZ-H ... B	KH-MFZ-H ... C
020	025	KH-MFZ-H ... A	KH-MFZ-H ... B	KH-MFZ-H ... C
025	032	KH-MFZ-H ... A	KH-MFZ-H ... B	KH-MFZ-H ... C
032	040	KH-MFZ-H ... A	KH-MFZ-H ... B	KH-MFZ-H ... C
040	050	KH-MFZ-H ... A	KH-MFZ-H ... B	KH-MFZ-H ... C
050	065	KH-MFZ-H ... A	KH-MFZ-H ... B	KH-MFZ-H ... C
065	080	KH-MFZ-H ... A	KH-MFZ-H ... B	KH-MFZ-H ... C
080	100	KH-MFZ-H ... A	KH-MFZ-H ... B	KH-MFZ-H ... C
100	125	KH-MFZ-H ... A	KH-MFZ-H ... B	KH-MFZ-H ... C
-	150	KH-MFZ-H ... A	KH-MFZ-H ... B	KH-MFZ-H ... C
150	200	KH-MFZ-H ... A	KH-MFZ-H ... B	KH-MFZ-H ... C